

- ◎ PCB电主轴系列
PCB electric spindle series
- ◎ 玻璃磨削电主轴系列
Electric spindle glass grinding series
- 高光及超精加工电主轴系列
High-gloss and superfinishing electric spindle series
- ◎ 超声波主轴系列
Ultrasonic spindle series
- ◎ 加工中心主轴系列
Machining center spindle series
- ◎ 雕铣电主轴系列
Engraving and milling electric spindle series
- ◎ 磨削产品系列
Grinding solutions
- ◎ 车床主轴系列
Lathe spindle series
- ◎ 木工电主轴系列
Woodworking electric spindle series
- ◎ 牙雕电主轴系列
Dental electric spindle series
- ◎ 半导体电主轴系列
Semiconductor electric spindle series
- ◎ 减速器系列
Reducer series
- ◎ 直线电机系列
Linear motor series
- ◎ 转台及摆头系列
Turntable and swivel rotary head series
- ◎ 刀柄夹头系列
Tool holder and collet series
- ◎ 夹具系列
Clamping series
- ◎ 昊志氢电空压机
Haozhi hydrogen electric air compressor
- ◎ 丝杠导轨系列
Guide rail screw series

高光及超精加工 电 主 轴 系 列

High-gloss and superfinishing
electric spindle series



www.haozhihs.com

广州总部	
☎ 电话: 020-6225 7588	☎ 传真: 020-6286 8322
✉ 邮箱: sales@haozhihs.com	
📍 地址: 广州市黄埔区禾丰路68号	
苏州分公司	
☎ 电话: 0512-5510 8383	☎ 传真: 0512-5510 7775
✉ 邮箱: sales@haozhihs.com	
📍 地址: 江苏省昆山市玉山镇城北中路888号	

www.haozhispindle.com

Guangzhou headquarters	
☎ Tel:+86-20-6225 7588 Ext.8225	✉ E-mail: info@haozhihs.com
📍 No. 68, Hefeng Road, Huangpu District, Guangzhou, China	
Suzhou Branch	
☎ Tel: +86-512-5510 8383	✉ sales@haozhihs.com
📍 No.888, Chengbei Zhong Road, YushanTown, Kunshan Jiangsu , China	



高精 · 高效 · 高稳定性

昊志机电产品之道

High precision · High efficiency · High stability

Haozhi Product Philosophy

为助力全球先进装备制造,
提升人类良好体验
而奋斗不止

keeps on striving for global advanced
manufacturing industry,for improving
human experience.

关于我们 About us

广州市昊志机电股份有限公司成立于2006年，是一家专业从事中高端数控机床、机器人、新能源汽车核心功能部件等的研发设计、生产制造、销售与维修服务的国家高新技术企业，于2016年在创业板上市（股票代码300503）。

昊志机电秉承“立足自主技术创新、服务全球先进制造”的发展战略，逐步发展成为国内外主轴专业领域中研产销规模最大的企业之一，电主轴领域全球市场占有率第一，公司立足主轴行业，借助在研发、制造、客户、品牌等方面的积累，稳步向数控机床和工业机器人等高端装备的核心功能部件领域横向扩张，目前产品涵盖PCB钻孔机/成型机/划片机电主轴、数控金属/玻璃雕铣机电主轴、数控车床主轴/电主轴、走芯车床电主轴、直结与皮带式机械主轴、加工中心电主轴、钻攻中心电主轴、高速内/外圆磨床主轴、木工雕铣机电主轴、高光及超精加工电主轴、超声波电主轴、液静压主轴、铣削动力头、末端执行机构、刀柄夹头、数控转台、直线电机、谐波减速器、数控系统、伺服电机、驱动器、传感器、燃料电池压缩机、曝气鼓风机、直驱类高速风机等数十个系列上百种产品。

昊志机电拥有一批经验丰富、锐意创新的科技型人才队伍，研发人员400余人，研究生占比12%，具备优异的创新水平、研发实力和竞争力，近三年平均研发投入占营收比重的8%以上，截止2026年04月30日，公司及境内子公司合计拥有专利852项。公司具备完善、齐全的各类高端实验室，包括：理化实验室、轴承实验室、测量实验室、电机实验室、综合性能实验室、切削实验室、直线电机实验室、减速机实验室、机器人实验室、磨合测试实验室、抗干扰能力实验室、可靠性实验室等。

Guangzhou Haozhi Industrial Co., Ltd.

Founded in 2006 and listed on GEM (stock code: 300503) in 2016, Haozhi is a international high-tech enterprise specializing in the R&D, design, production, sales, and maintenance of core functional components for mid- to high-end CNC machine tools, robots, and new-energy vehicles. Haozhi leads the motor spindles market and continues to expand.

Haozhi product range includes:

- Dental Spindles
- High Speed Cutting Spindles
- High Performance Cutting Spindles
- Coupling Spindles
- Turning Spindles
- Grinding Spindles
- PCB Drilling/Routing Spindles
- Ultra-precision Finish Milling Spindles
- Collets and Tool holders
- 4 Axis and 5 Axis Rotary Tables
- Linear Motors
- Cobots/Harmonic Reducers/Robot Joint/Brake/Torque Sensor/End Effector
- EV Hydrogen Compressor

Haozhi boasts a highly skilled and innovative team with over 400 R&D personnel and more than 30 specially appointed experts, both domestic and international masters. The proportion of R&D investment in operating income over the past three years exceeds 8%, resulting in 852 patents as of April 30, 2026. Haozhi maintains comprehensive high-end laboratories for extensive testing and innovation.



禾丰厂 Hefeng Factory



江东厂 Jiangdong Factory



田园厂 Tianyuan Factory



湖南显隆厂 Hunan Xianlong Factory



瑞士工厂 Swiss Factory



汇聚全球顶尖的加工设备
最高加工精度可达0.1 μ m

Gathering world-class cutting-edge
processing equipments

Featuring Asia's first fully automated
production line, machining precision up
to 0.1 μ m.

全球知名的生产基地

厂房建筑面积18.9万平方米, 产能达约360,000台套/年

Global Manufacturing Base

Covering an area of 189,000m², Annual production capacity of approximately 360,000 units



雄踞世界级技术研究中心

400余人研发团队, 近三年研发投入占
销售额8%以上

Haozhi has world-class technology
research center

More than 400 R&D investment in the
past three years accounted for more than
8% of sales



西班牙厂 Spanish Factory



上海工厂 Shanghai Factory



法国工厂 French Factory



国际一流检测仪器及设备
具备纳米级检测精度

Ultra-precision Measuring and
Inspection Instruments

With nanoscale precision

CRAFTSMANSHIP 工匠精神

他们说 They Said
他说 He Said
她说 She Said

坚持做一件事，
聚焦做一件事，
简单的事情做到极致。
Stick with one thing.
Concentrate on one thing.
Make the best of simple thing.





主要性能特点

Main Features

高光及超精加工电主轴系列 >>>

High-gloss and superfinishing electric spindle series

主要应用于高光行业，主要适合加工金属铝及其合金、铜及其合金、亚克力非金属等材料。
Mainly applied for the fine finish industry and used for processing aluminum and its alloys, copper and its alloys, acrylic nonmetal materials, etc.




长寿命 采用气体静压轴承，非接触，无磨损，长寿命。	Long service life It prolongs the service life by using aerostatic bearing for its non-contact, non-wear characteristics.
高精度 由于气体静压轴承的均化效应及高达0.2μm的零件加工精度，因此有比滚珠轴承电主轴更高的静态和动态精度。	High precision The static and dynamic accuracy are higher than ball bearing electronic spindle due to the homogenization of aerostatic bearing and the high machining precision of 0.2μm.
高刚性 低振动 轴承经过精密计算及独有的仿真分析软件验证，具有低振动、高刚性、高承载能力的优势。	High rigidity low vibration It has lower vibration, higher rigidity and bearing capacity after precise calculation and the verification by unique simulation analysis.
高配置 配备高性能异步感应电机或永磁同步电机，大扭矩输出，适用于多种加工应用。	High configuration Equipped with high-performance asynchronous induction motor or permanent magnet synchronous motor, high torque output, suitable for a variety of processing applications.
高可靠性 采用双螺旋冷却结构，主轴保持恒温加工，各项性能稳定可靠。	High reliability Owing to the unique cooling structure of double helix and the constant temperature during processing, the performances are stable and reliable.
自动换刀 部分产品配备HSK E20/E25/E32/E40刀柄，具有更高的轴向、径向定位精度，同时可自动换刀。	Automatic tool changing Some of the products use HSK E20/E25/E32/E40 shanks, therefore, the axial and radial position precision are higher and the tool can be changed automatically.



表面质量：Ra≤0.06um
加工类别：磨削
The surface quality Ra≤0.06um
Processing category: grinding





表面质量：Ra≤0.03um
加工类别：镜面铣削（侧铣）
The surface quality Ra≤0.03um
Processing category: Specular milling (side milling)

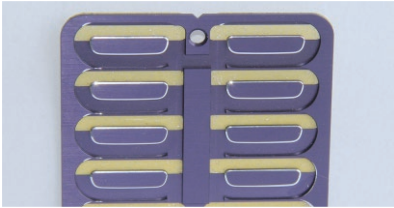

表面质量：Ra≤0.03um
加工类别：高光倒角
The surface quality Ra≤0.03um
Processing category: specular chamfering

DQFX-062100/1.2A1-WM

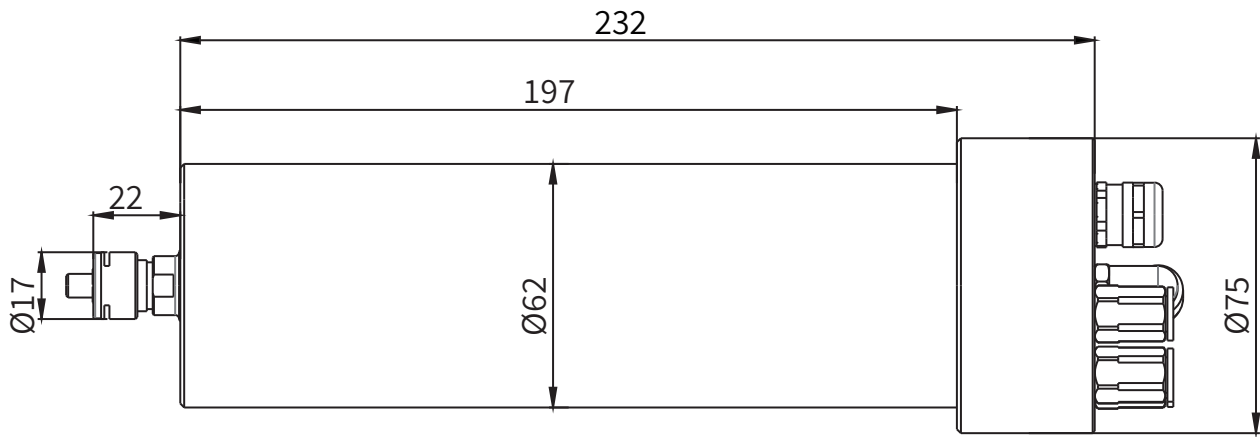
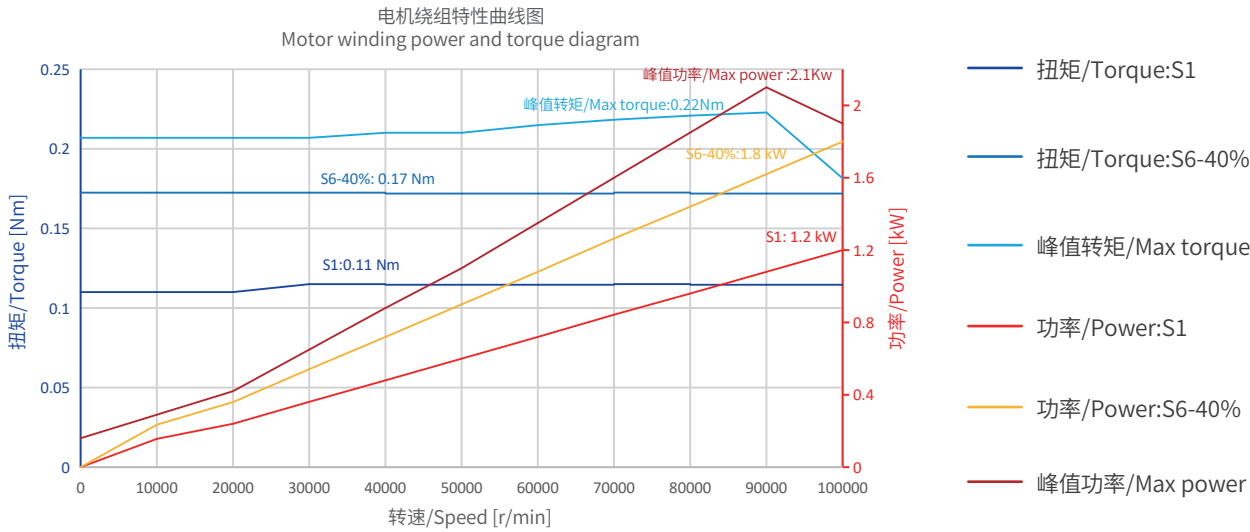


型号	DQFX-062100/1.2A1-WM	Spindle model	DQFX-062100/1.2A1-WM
直径	Φ62mm	Diameter	Φ62mm
最高转速	100,000rpm	The highest speed	10,000rpm
刀柄型号	ER11夹头	Tool interface	ER11 Collect
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	1,667Hz	Max. Frequency	1,677Hz
电机类型	异步	Motor system	Asynchronous
额定电压	220V	The rated voltage	220V
输出功率S1 100%	1.2kW	Power output S1 100%	1.2kW
输出功率S6 40%	1.8kW	Power output S6 40%	1.8kW
输出扭矩S1 100%	0.11N.m	Output torque S1 100%	0.11N.m
输出扭矩S6 40%	0.17N.m	Output torque S6 40%	0.17N.m
额定电流S1 100%	3.6A	Rated current S1 100%	3.6A
额定电流S6 40%	4.3A	Rated current S6 40%	4.3A
气流量	58-68L/min	Gas flow	58-68L/min
冷却方式	水冷	Cooling system	Water cooling
冷却流量	≥1.5L/min	The cooling flow rate	≥1.5L/min
电机温度传感器类型	PT100	Motor temperature sensor type	PT100
换刀方式	手动	Tool change	Manual
换刀气压	/	Tool change air pressure	/
振动速度	≤1mm/s	Vibration velocity	≤1mm/s
重量	5.1kg	Weight	5.1kg

DQFX-100A



电机绕组特性曲线图
Motor winding power and torque diagram

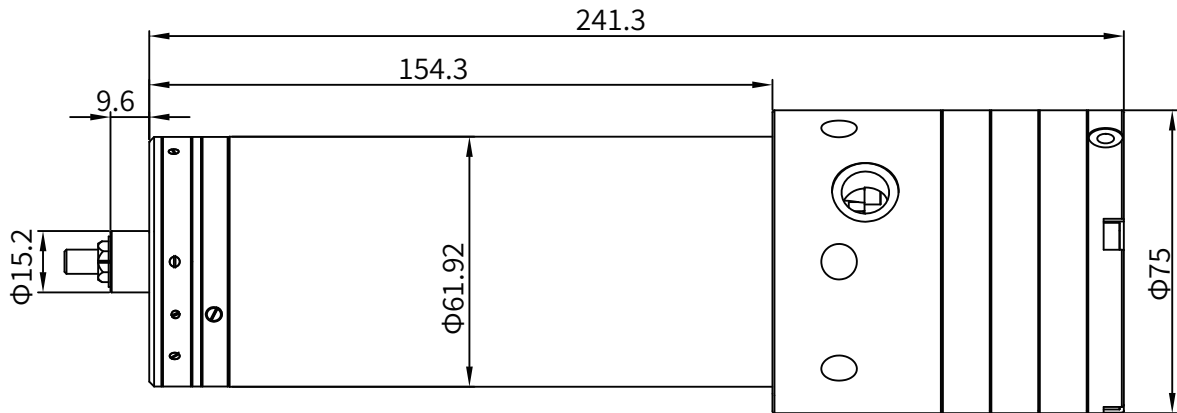
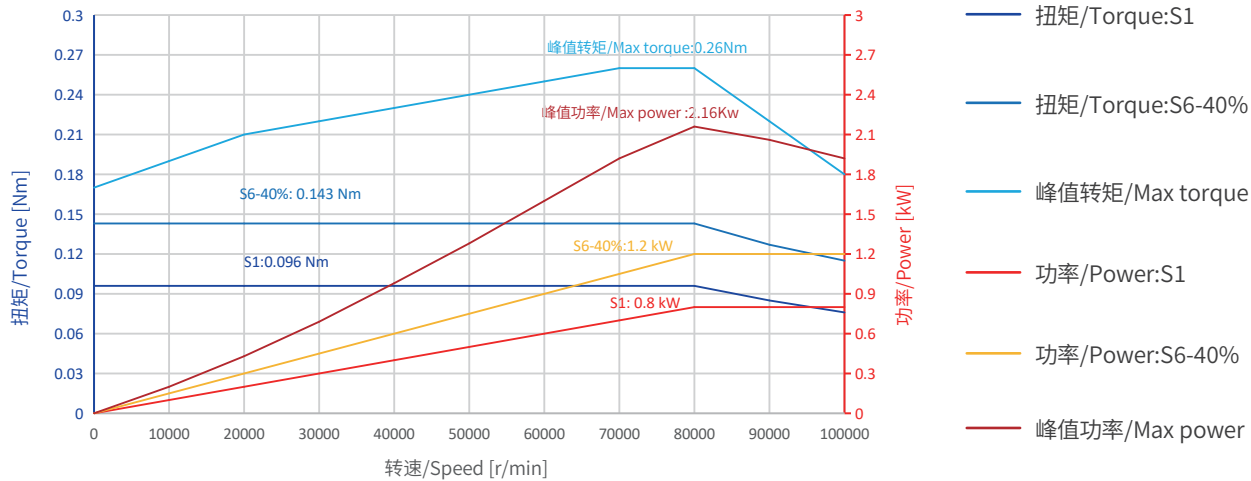


型号	DQFX-100A	Spindle model	DQFX-100A
直径	Φ61.902-Φ61.91mm	Diameter	Φ61.902-Φ61.91mm
最高转速	100,000rpm	The highest speed	100,000rpm
刀柄型号	Φ6 直柄式夹头	Tool interface	Φ6 straight shank collet
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	1,667Hz	Max. Frequency	1,667Hz
电机类型	异步	Motor system	Asynchronous
额定电压	200V	The rated voltage	200V
输出功率S1 100%	0.8kW	Power output S1 100%	0.8kW
输出功率S6 40%	1.2kW	Power output S6 40%	1.2kW
输出扭矩S1 100%	0.096N.m	Output torque S1 100%	0.096N.m
输出扭矩S6 40%	0.143N.m	Output torque S6 40%	0.143N.m
额定电流S1 100%	2.9A	Rated current S1 100%	2.9A
额定电流S6 40%	4.35A	Rated current S6 40%	4.35A
气流量	48-56L/min (气压0.6MPa)	Gas flow	48-56L/min(Air pressure 0.6MPa)
冷却方式	油或水冷	Cooling system	Oil or Water cooling
冷却流量	≥1.5L/min	The cooling flow rate	≥1.5L/min
电机温度传感器类型	PTC(100℃)	Motor temperature sensor type	PTC(100℃)
换刀方式	自动	Tool change	Automatic
换刀气压	0.56-0.6MPa	Tool change air pressure	0.56-0.6MPa
振动速度	≤1.0mm/s	Vibration velocity	≤1.0mm/s
重量	4kg	Weight	4kg

DQFX-08080/1.5-KPWM






电机绕组特性曲线图
Motor winding power and torque diagram

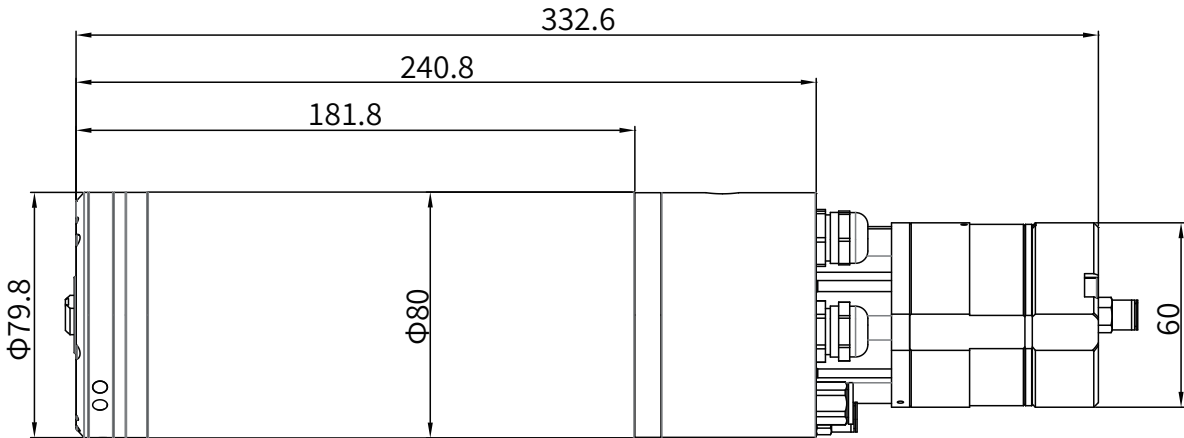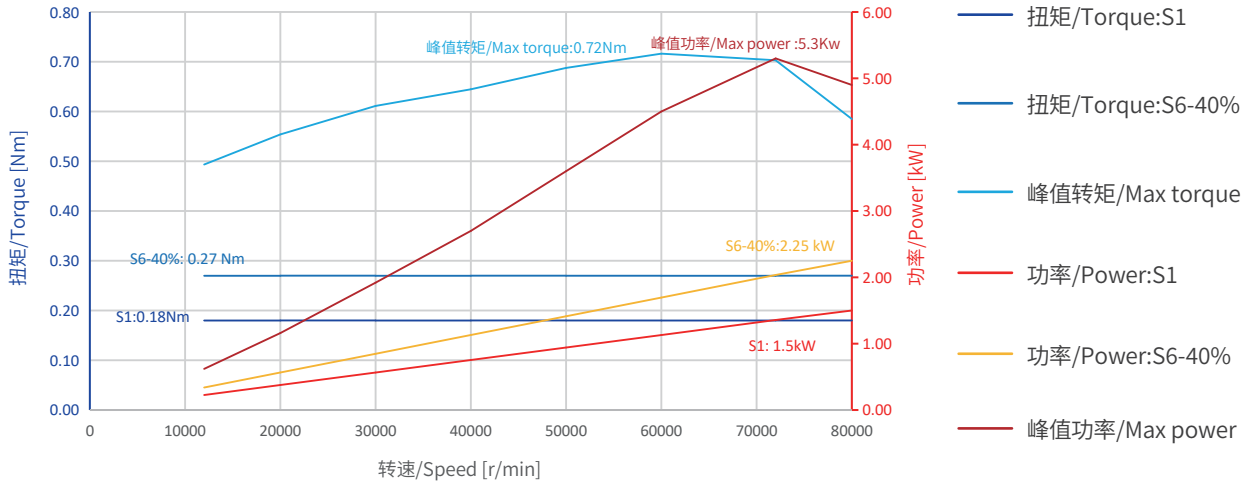


型号	DQFX-08080/1.5-KPWM	Spindle model	DQFX-08080/1.5-KPWM
直径	Φ80mm	Diameter	Φ80mm
最高转速	72,000rpm	The highest speed	72,000rpm
刀柄型号	HSK E20	Tool interface	HSK E20
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	1,200Hz	Max. Frequency	1,200Hz
电机类型	异步	Motor system	Asynchronous
额定电压	220V	The rated voltage	220V
输出功率S1 100%	1.5kW	Power output S1 100%	1.5kW
输出功率S6 40%	2.25kW	Power output S6 40%	2.25kW
输出扭矩S1 100%	0.18N.m	Output torque S1 100%	0.18N.m
输出扭矩S6 40%	0.27N.m	Output torque S6 40%	0.27N.m
额定电流S1 100%	4.9A	Rated current S1 100%	4.9A
额定电流S6 40%	7.35A	Rated current S6 40%	7.35A
气流量	66-72L/min (气压0.15MPa)	Gas flow	66-72L/min(Air pressure 0.15MPa)
冷却方式	水冷	Cooling system	Water cooling
冷却流量	≥2L/min	The cooling flow rate	≥2L/min
电机温度传感器类型	PT100	Motor temperature sensor type	PT100
换刀方式	自动	Tool change	Automatic
换刀气压	0.4-0.5MPa	Tool change air pressure	0.4-0.5MPa
振动速度	≤1.0mm/s	Vibration velocity	≤1.0mm/s
重量	8.3kg	Weight	8.3kg

DQFH-02360/1.8

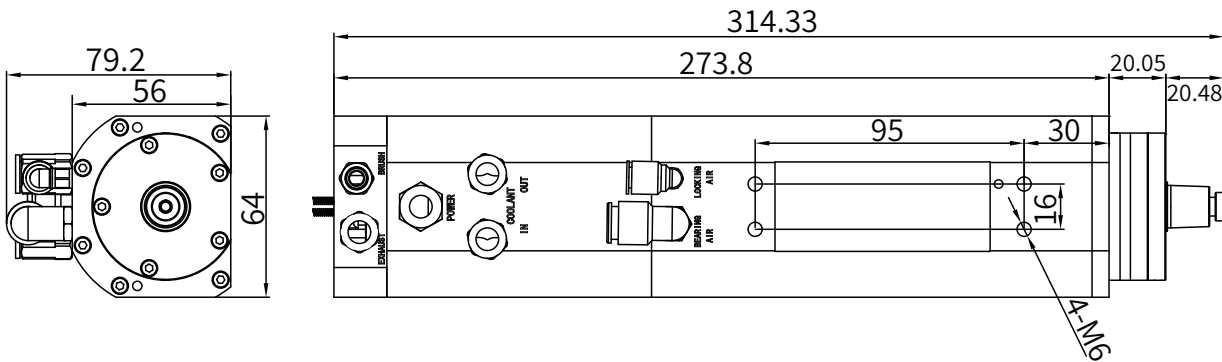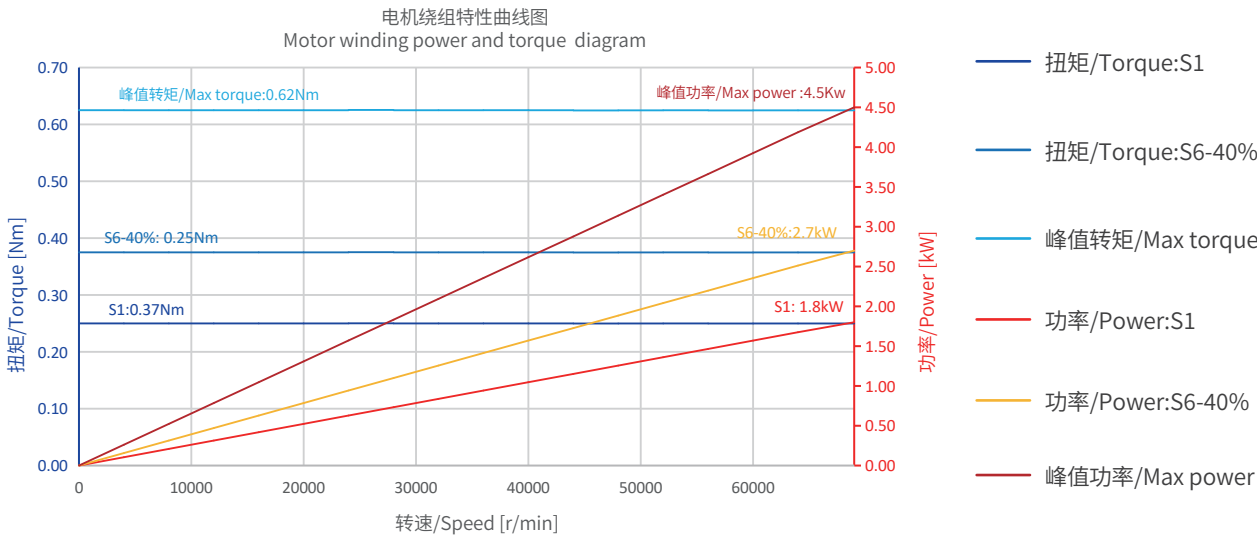
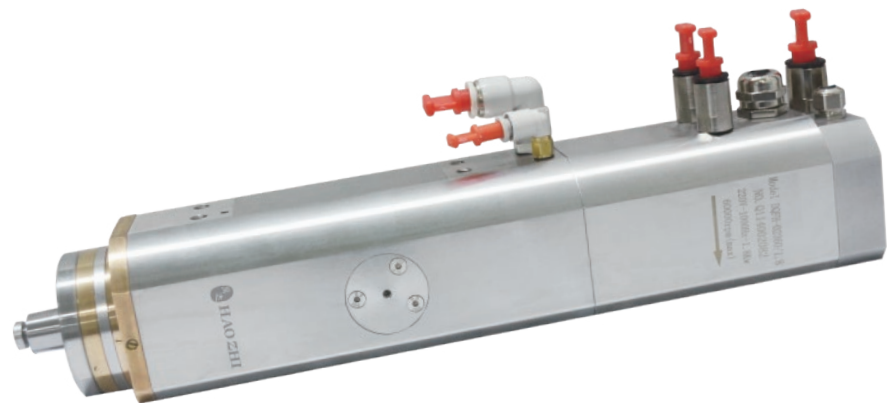


型号	DQFH-02360/1.8	Spindle model	DQFH-02360/1.8
最高转速	60,000rpm	The highest speed	60,000rpm
刀具接口	通用刀座	Tool interface	Generic dicing blades
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	1000Hz	Max. Frequency	1000Hz
电机类型	同步	Motor system	Synchronous
额定电压	220V	The rated voltage	220V
输出功率S1 100%	1.8kW	Power output S1 100%	1.8kW
输出功率S6 40%	2.2kW	Power output S6 40%	2.2kW
输出扭矩S1 100%	0.25N.m	Output torque S1 100%	0.25N.m
输出扭矩S6 40%	0.3N.m	Output torque S6 40%	0.3N.m
额定电流S1 100%	5.1A	Rated current S1 100%	5.1A
额定电流S6 40%	6.1A	Rated current S6 40%	6.1A
气流量	90-102L/min	Gas flow	90-102L/min
冷却方式	水冷	Cooling system	Water cooling
冷却流量	≥2L/min	The cooling flow rate	≥2L/min
电机温度传感器类型	KTY84-130	Motor temperature sensor type	KTY84-130
换刀方式	手动换刀	Tool change	Manual
振动速度	≤0.5mm/s	Vibration velocity	≤0.5mm/s
重量	6.6kg	Weight	6.6kg

DQFH-02360B/2.4


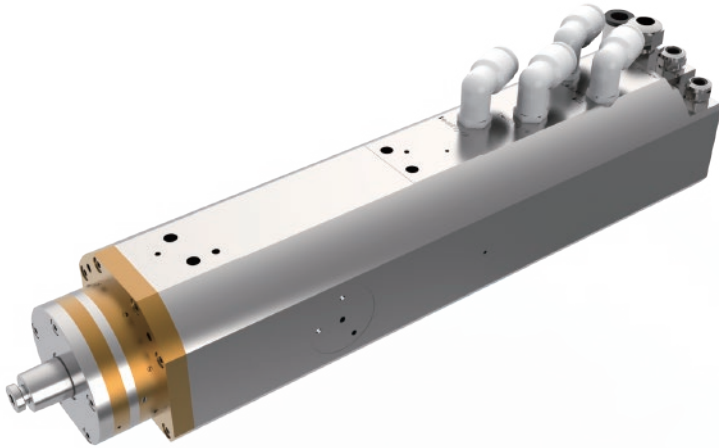


电机绕组特性曲线图
Motor winding power and torque diagram

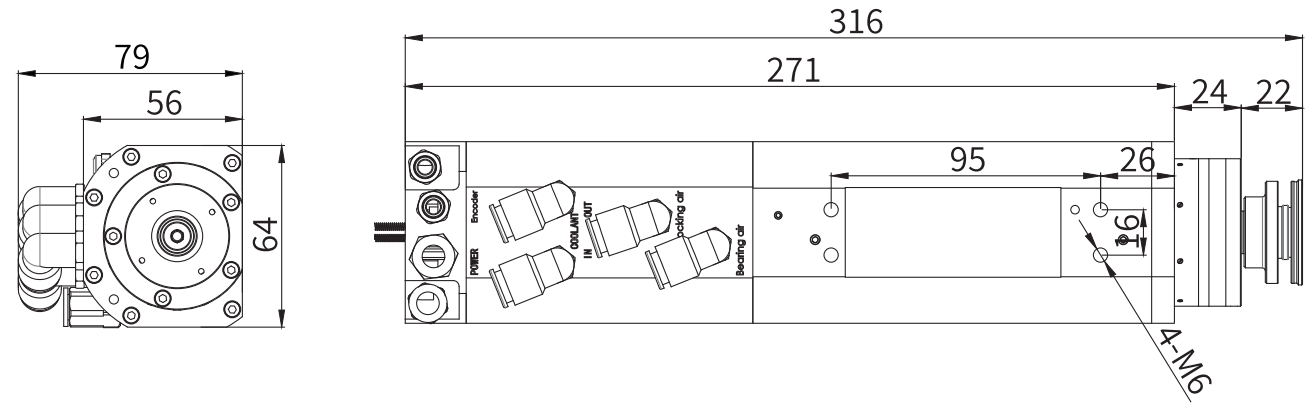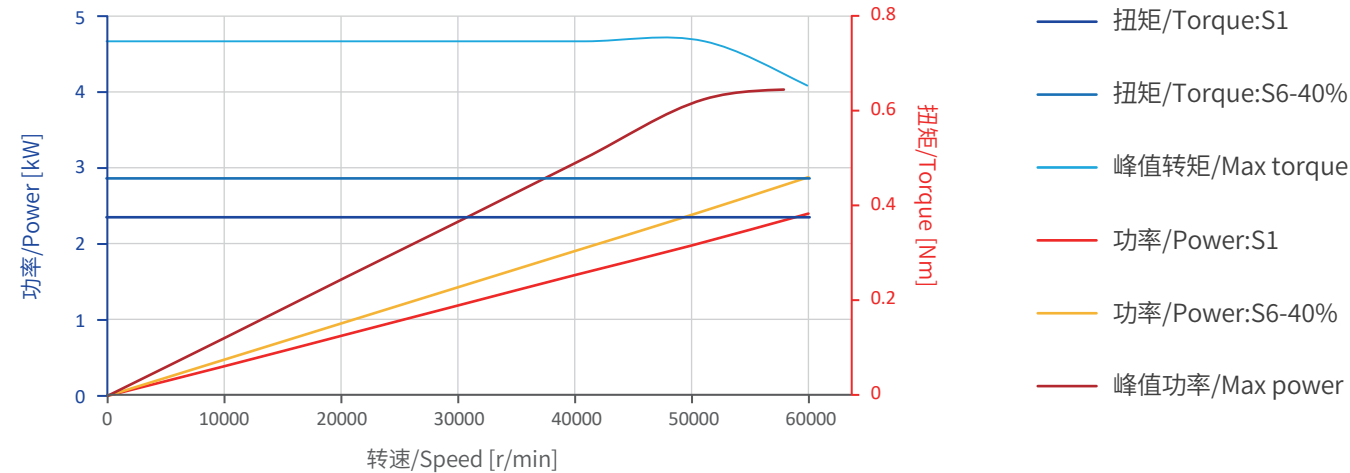

型号	DQFH-02360B/2.4	Spindle model	DQFH-02360B/2.4
最高转速	60,000rpm	The highest speed	60,000rpm
刀具接口	通用刀座	Tool interface	Generic dicing blades
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	2000Hz	Max. Frequency	2000Hz
电机类型	同步	Motor system	Synchronous
额定电压	220V	The rated voltage	220V
输出功率S1 100%	2.4kW	Power output S1 100%	2.4kW
输出功率S6 40%	2.9kW	Power output S6 40%	2.9kW
输出扭矩S1 100%	0.38N.m	Output torque S1 100%	0.38N.m
输出扭矩S6 40%	0.46N.m	Output torque S6 40%	0.46N.m
额定电流S1 100%	7.5A	Rated current S1 100%	7.5A
额定电流S6 40%	11.25A	Rated current S6 40%	11.25A
气流量	70-80L/min	Gas flow	70-80L/min
冷却方式	水冷	Cooling system	Water cooling
冷却流量	≥2L/min	The cooling flow rate	≥2L/min
电机温度传感器类型	KTY84-130	Motor temperature sensor type	KTY84-130
换刀方式	手动换刀	Tool change	Manual
振动速度	≤0.2mm/s	Vibration velocity	≤0.2mm/s
重量	7.74kg	Weight	7.74kg

DQFH-02440/2.5

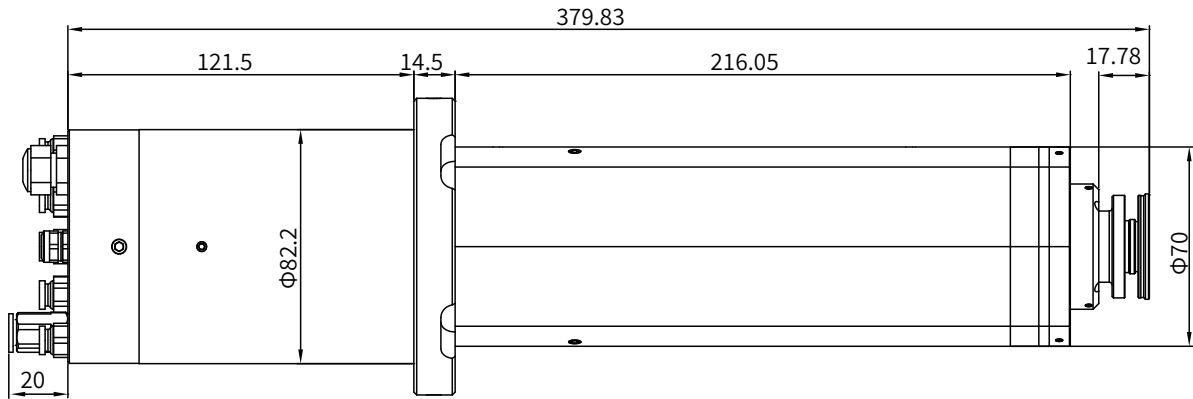
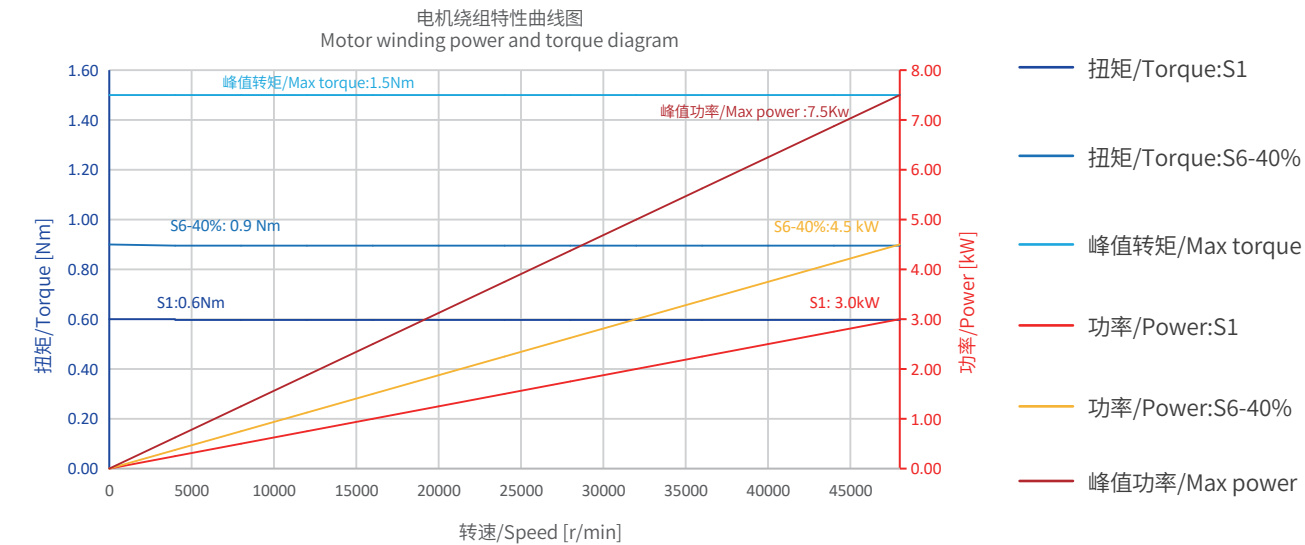


型号	DQFH-02440/2.5	Spindle model	DQFH-02440/2.5
直径	Φ82mm	Diameter	Φ82mm
最高转速	40,000rpm	The highest speed	40,000rpm
刀具接口	通用刀座	Tool interface	Generic dicing blades
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	666.7Hz	Max. Frequency	666.7Hz
电机类型	同步	Motor system	Synchronous
额定电压	220V	The rated voltage	220V
输出功率S1 100%	3kW	Power output S1 100%	3kW
输出功率S6 40%	4.5kW	Power output S6 40%	4.5kW
输出扭矩S1 100%	0.6N.m	Output torque S1 100%	0.6N.m
输出扭矩S6 40%	0.9N.m	Output torque S6 40%	0.9N.m
额定电流S1 100%	8.8A	Rated current S1 100%	8.8A
额定电流S6 40%	13.2A	Rated current S6 40%	13.2A
气流量	82-90L/min	Gas flow	72-90L/min
冷却方式	水冷	Cooling system	Water cooling
冷却流量	≥2L/min	The cooling flow rate	≥2L/min
电机温度传感器类型	KTY84-130	Motor temperature sensor type	KTY84-130
换刀方式	手动换刀	Tool change	Manual
振动速度	≤0.3mm/s	Vibration velocity	≤0.3mm/s
重量	10.8kg	Weight	10.8kg

DQFH-02360/2.5





电机绕组特性曲线图
Motor winding power and torque diagram

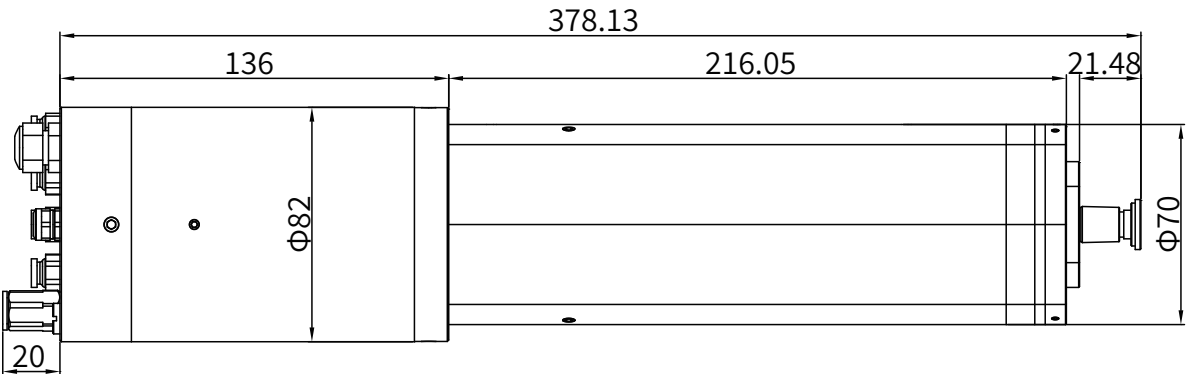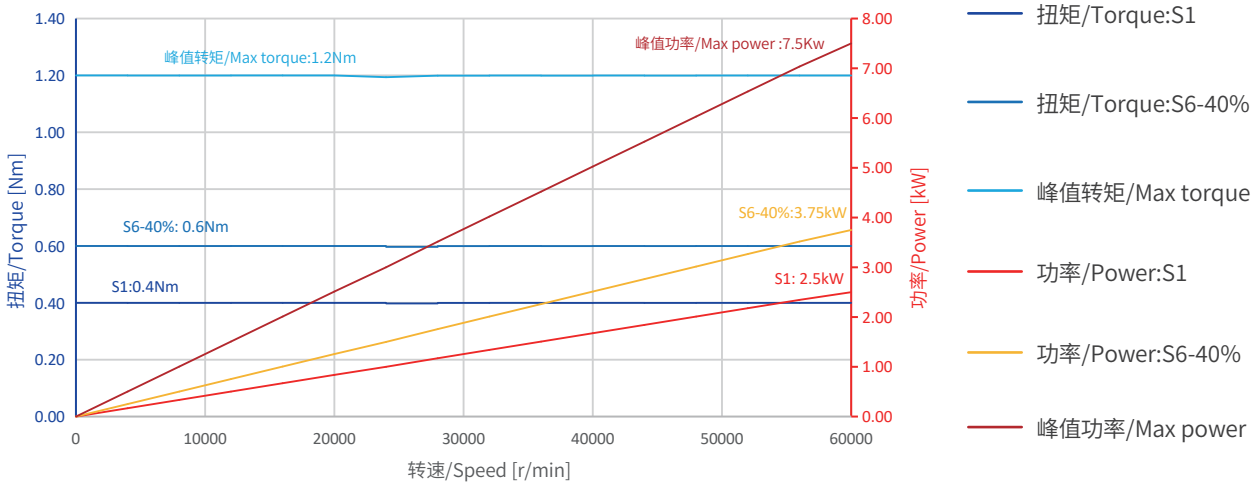



型号	DQFH-02360/2.5	Spindle model	DQFH-02360/2.5
直径	Φ82mm	Diameter	Φ82mm
最高转速	60,000rpm	The highest speed	60,000rpm
刀具接口	通用刀座	Tool interface	Generic dicing blades
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	1,000Hz	Max. Frequency	1,000Hz
电机类型	同步	Motor system	Synchronous
额定电压	220V	The rated voltage	220V
输出功率S1 100%	2.5kW	Power output S1 100%	2.5kW
输出功率S6 40%	3.75kW	Power output S6 40%	3.75kW
输出扭矩S1 100%	0.4N.m	Output torque S1 100%	0.4N.m
输出扭矩S6 40%	0.6N.m	Output torque S6 40%	0.6N.m
额定电流S1 100%	7.5A	Rated current S1 100%	7.5A
额定电流S6 40%	11.3A	Rated current S6 40%	11.3A
气流量	82-90L/min	Gas flow	82-90L/min
冷却方式	水冷	Cooling system	Water cooling
冷却流量	≥2L/min	The cooling flow rate	≥2L/min
电机温度传感器类型	KTY84-130	Motor temperature sensor type	KTY84-130
换刀方式	手动换刀	Tool change	Manual
振动速度	≤0.2mm/s	Vibration velocity	≤0.2mm/s
重量	10.5kg	Weight	10.5kg

DQFX-12060/1.2-KFPWVJM

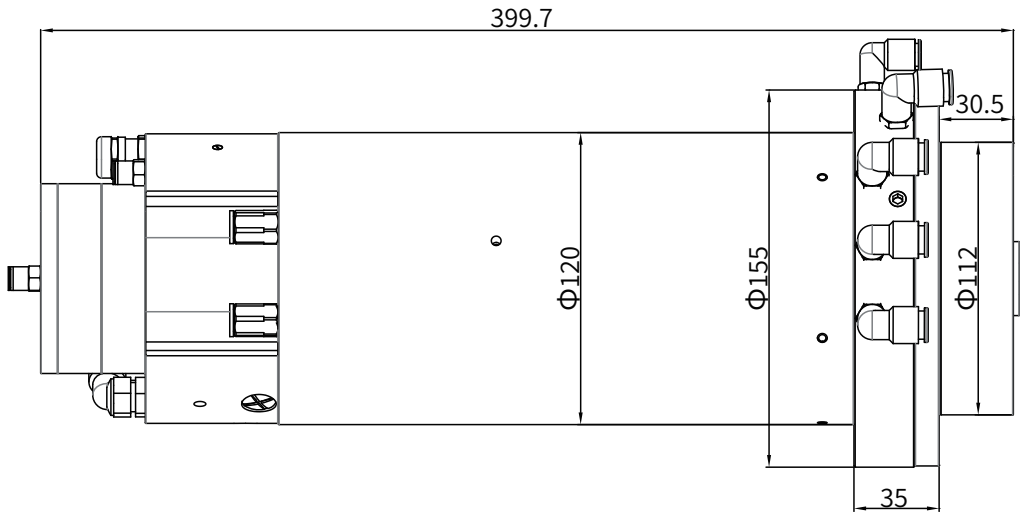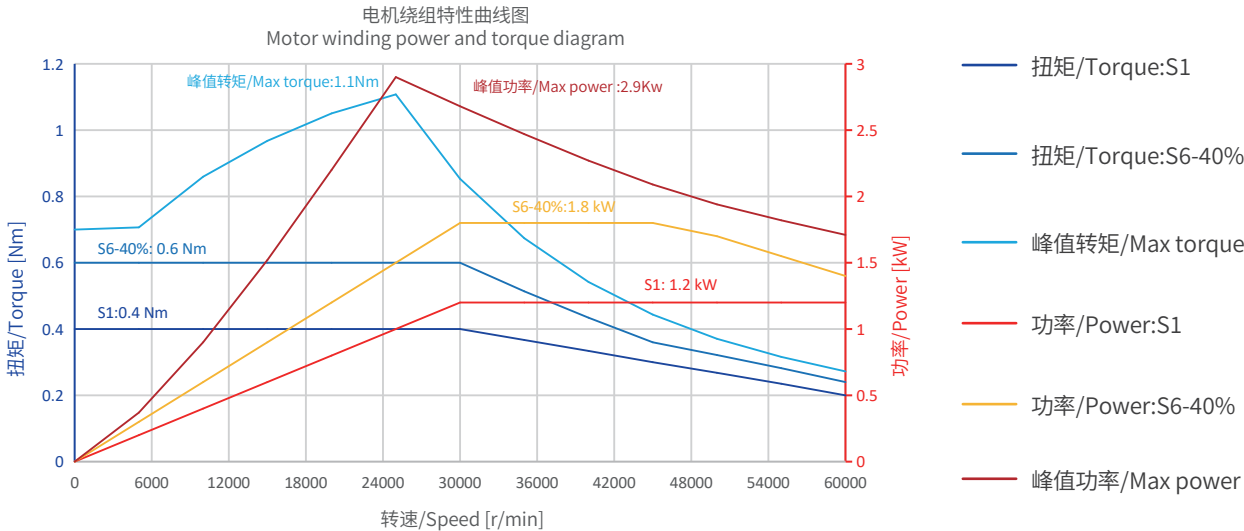



型号	DQFX-12060/1.2-KFPWVJM	Spindle model	DQFX-12060/1.2-KFPWVJM
直径	Φ120mm	Diameter	Φ120mm
最高转速	60,000rpm	The highest speed	60,000rpm
刀柄型号	HSK E25	Tool interface	HSK E25
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	1,000Hz	Max. Frequency	1,000Hz
电机类型	异步	Motor system	Asynchronous
额定电压	220V	The rated voltage	220V
输出功率S1 100%	1.2kW	Power output S1 100%	1.2kW
输出功率S6 40%	1.8kW	Power output S6 40%	1.8kW
输出扭矩S1 100%	0.4N.m	Output torque S1 100%	0.4N.m
输出扭矩S6 40%	0.6N.m	Output torque S6 40%	0.6N.m
额定电流S1 100%	4.2A	Rated current S1 100%	4.2A
额定电流S6 40%	6.3A	Rated current S6 40%	6.3A
气流量	38-46L/min	Gas flow	38-46L/min
冷却方式	水冷	Cooling system	Water cooling
冷却流量	≥5L/min	The cooling flow rate	≥5L/min
电机温度传感器类型	KTY84-130	Motor temperature sensor type	KTY84-130
换刀方式	自动	Tool change	Automatic
换刀气压	0.4-0.5MPa	Tool change air pressure	0.4-0.5MPa
振动速度	≤0.2mm/s	Vibration velocity	≤0.2mm/s
重量	28kg	Weight	28kg

DQFX-16506/8.5-WM

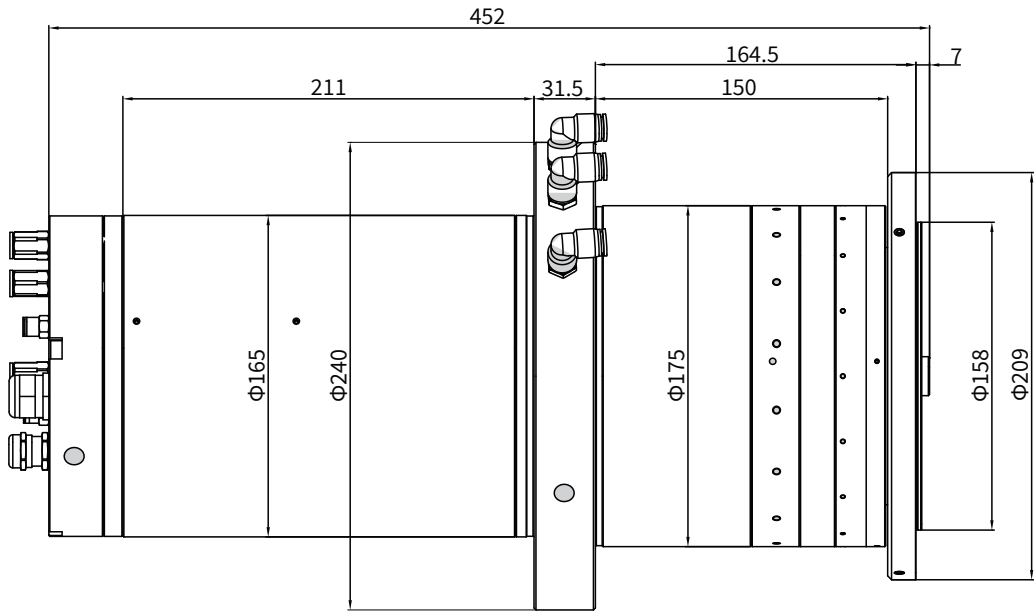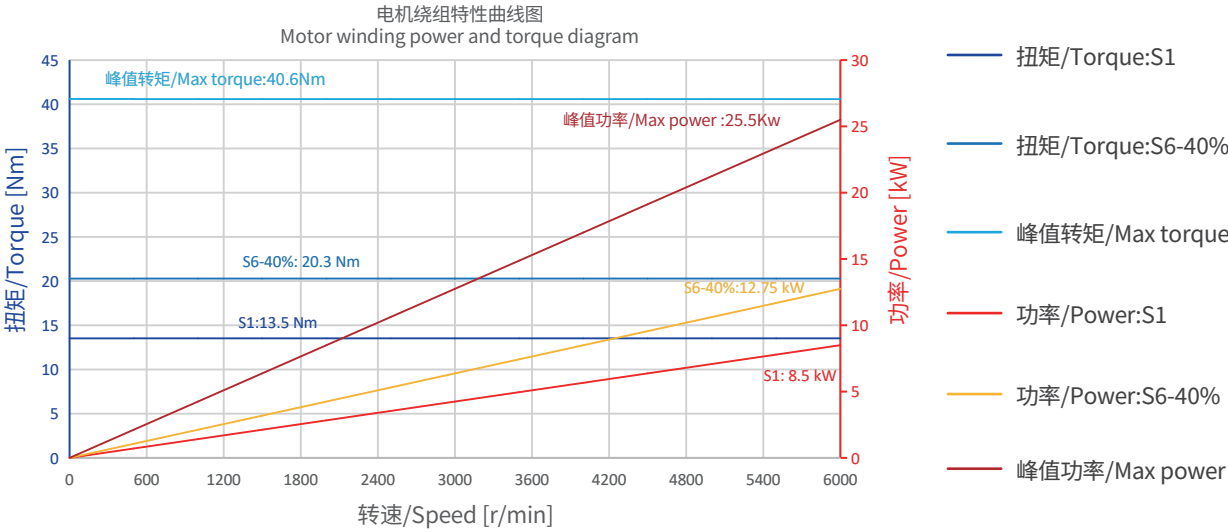

型号	DQFX-16506/8.5-WM	Spindle model	DQFX-16506/8.5-WM
直径	$\Phi 165\text{mm}$	Diameter	$\Phi 165\text{mm}$
最高转速	6,000rpm	The highest speed	6,000rpm
砂轮尺寸	200mm/8英寸	Grinding wheel dimensions	200mm/8inch
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	400Hz	Max. Frequency	400Hz
电机类型	同步	Motor system	Synchronous
额定电压	220V	The rated voltage	220V
输出功率S1 100%	8.5kW	Power output S1 100%	8.5kW
输出功率S6 40%	12.75kW	Power output S6 40%	12.75kW
输出扭矩S1 100%	13.5N.m	Output torque S1 100%	13.5N.m
输出扭矩S6 40%	20.3N.m	Output torque S6 40%	20.3N.m
额定电流S1 100%	27A	Rated current S1 100%	27A
额定电流S6 40%	40.5A	Rated current S6 40%	40.5A
气流量	76-84L/min (气压0.6MPa)	Gas flow	76-84L/min(Air pressure 0.6MPa)
冷却方式	水冷	Cooling system	Water cooling
冷却流量	$\geq 2.5\text{L/min}$	The cooling flow rate	$\geq 2.5\text{L/min}$
电机温度传感器类型	KTY84-130	Motor temperature sensor type	KTY84-130
换刀方式	手动	Tool change	Manual
振动速度	$\leq 0.15\text{mm/s}$	Vibration velocity	$\leq 0.15\text{mm/s}$
重量	79.5kg	Weight	79.5kg

DQFYM-20904/7.5-WM

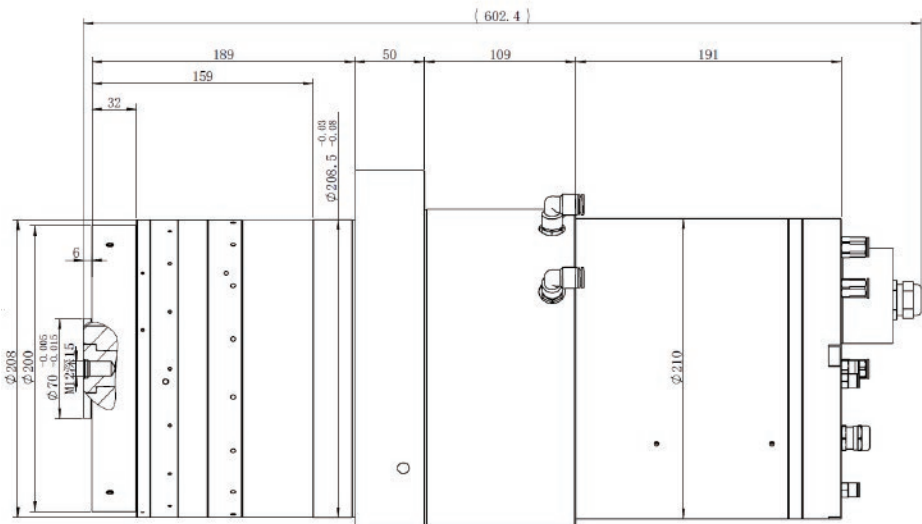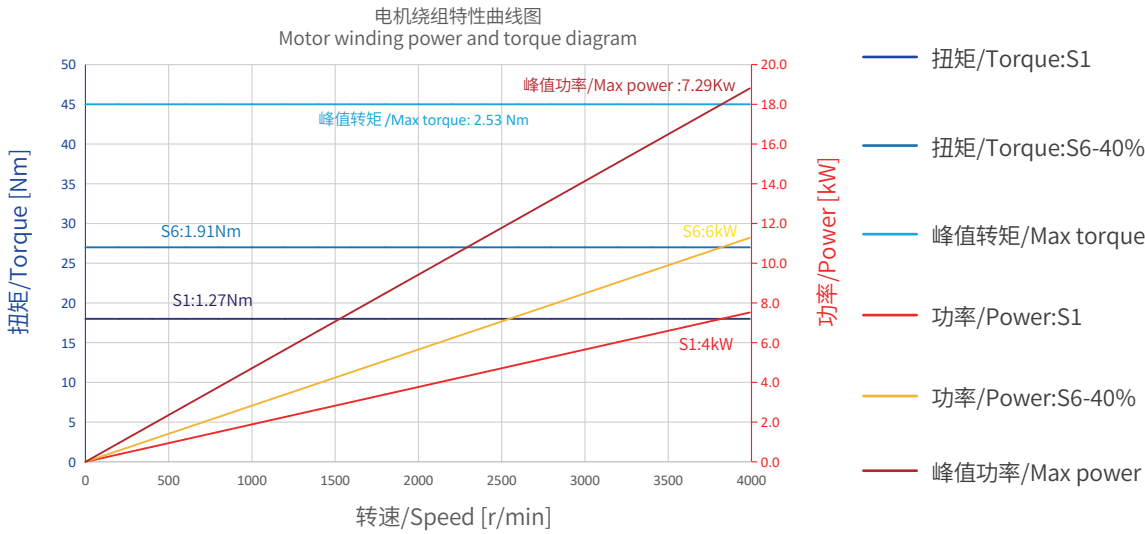

型号	DQFYM-20904/7.5-WM	Spindle model	DQFYM-20904/7.5-WM
直径	Φ208.5mm	Diameter	Φ208.5mm
最高转速	4,000rpm	The highest speed	4,000rpm
砂轮尺寸	300mm/12英寸	Grinding wheel dimensions	300mm/12inch
轴承类型	气浮轴承	Bearing type	Air bearing
最大频率	266Hz	Max. Frequency	266Hz
电机类型	同步	Motor system	Synchronous
额定电压	220V	The rated voltage	220V
输出功率S1 100%	7.5kW	Power output S1 100%	7.5kW
输出功率S6 40%	11.25kW	Power output S6 40%	11.25kW
输出扭矩S1 100%	18N.m	Output torque S1 100%	18N.m
输出扭矩S6 40%	27N.m	Output torque S6 40%	27N.m
额定电流S1 100%	23.5A	Rated current S1 100%	23.5A
额定电流S6 40%	32.5A	Rated current S6 40%	32.5A
气流量	60-90L/min (气压0.65MPa)	Gas flow	60-90L/min(Air pressure 0.65mpa)
冷却方式	水冷	Cooling system	Water cooling
冷却流量	≥3.5L/min	The cooling flow rate	≥3.5L/min
电机温度传感器类型	KTY84-130	Motor temperature sensor type	KTY84-130
换刀方式	手动	Tool change	Manual
振动速度	0.15mm/s	Vibration velocity	0.15mm/s
重量	150.5kg	Weight	150.5kg

市场布局

Market Layout



 Manufacturing Sites  Sales & Service Locations

Europe

- | | | |
|---|--|--|
|  Barcelona, Spain
MAVILOR MOTORS S.A.U. |  Yverdon-les-Bains, Switzerland
CYBELEC SA |  Lourdes, France
INFRANOR SAS |
|  Hanau, Germany
INFRANOR GERMANY |  Arese (MI), Italy
INFRANOR ITALY |  Barcelona, Spain
INFRANOR SPAIN |
|  Regensdorf, Switzerland
INFRANOR SWITZERLAND |  Lourdes, France
INFRANOR SAS | |

North America

-  Wilmington, MA, USA
INFRANOR USA

ASIA

- | | |
|---|--|
|  Guangzhou, China
Guangzhou Haozhi Industrial Co., Ltd. |  Yueyang, Hunan, China
KLKJ |
|  Shanghai, China
CNCT |  Yueyang, Hunan, China
Hunan Linear Motion |
|  Suzhou, China
Guangzhou Haozhi Industrial Co., Ltd. |  Shanghai, China
IMCT |
|  Bac Ninh Province, Vietnam
Haozhi Industrial (Vietnam) Co., Ltd. | |

**为客户带去超值 · 为股东创造所值
为员工体现价值 · 为社会营造增值**

Deliver Extra Value To Customers.
Create Lucrative Value For Shareholders.
Help Employees Realize Their Values.
Bring Added- Value To Society.